

## 2 Tone Chime

## AD-2T

- One and two tone gong
- Microprocessor PWM tone output
- Volume adjustable locally with a maximum level of 86dB at 1 meter
- Volume adjustable remotely to 50% of local Setting
- Positive or negative common compatible




The AD-2T one and two tone gong is extremely compact - but it is big on specifications and quality, and introduces several innovative features.

One feature destined to be appreciated is the option to remotely control the AD-2T so that its volume is reduced by 50% for a user determined period. The lift arrival at each landing can be sounded at full volume from, say, 7am to 7pm each day and for all other hours the volume is halved. The volume of individual AD-2T gongs can also be adjusted independently to obtain the optimal volume for each landing and this adjustment will apply to both the full and half volume output levels.

Weighing just 44 grams, the AD-2T punches well above its weight, producing a sound pressure level of up to 86 dB - around 6 dB more than gongs three times as heavy and twice the size. And it does this with both excellent tone and clarity.

### Dimensions:

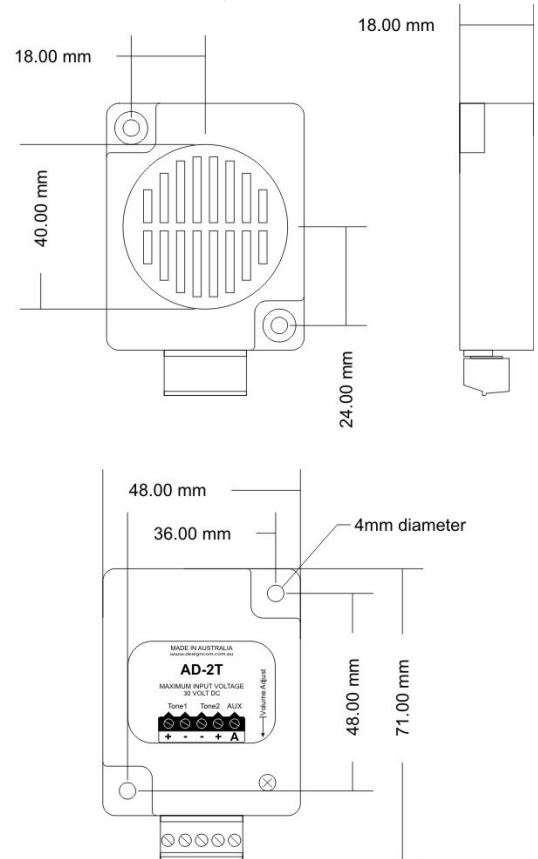

### Specifications:

Operating Voltage	12V - 30V DC
Operating Current	250mA @ full volume
Tones	Input 1 = Tone1 (up), Input 2 = Tone2 (down)
Amplifier Power	1.3W
Speaker	8 Ω
SPL Output	86dB Max at 1 meter
Board Dimensions	(L) 71mm x (W) 48mm x (H) 18mm

### Design-Com Technologies Pty Ltd

Designed and manufactured in Australia

#### Head Office

Melbourne, Australia  
 New Zealand  
 Singapore

sales@designcom.com.au  
 sales@cirrusinternational.com  
 sales@designcom.com.sg

T: +61 3 9262 6888  
 T: +64 3 343 5220  
 T: +65 6747 9004

F: +61 3 9262 6888  
 F: +64 3 343 2820  
 F: +65 6777 7605

#### Distributors

Sydney, Australia  
 Brisbane, Australia  
 Perth, Australia  
 United Kingdom  
 Canada

info@alc.com.au  
 info@wildindustries.com.au  
 info@dualengraving.com.au  
 info@liftstore.com  
 info@dupar.com

T: +61 2 9603 0200  
 T: +61 7 3899 6533  
 T: +61 8 9443 3677  
 T: +44 0 1352 793222  
 T: +888 629 6279

F: +61 2 9603 2700  
 F: +61 7 3899 6544  
 F: +61 8 9443 3688  
 F: +44 0 1352 793255  
 F: +519 624 2524